

FIG. 1

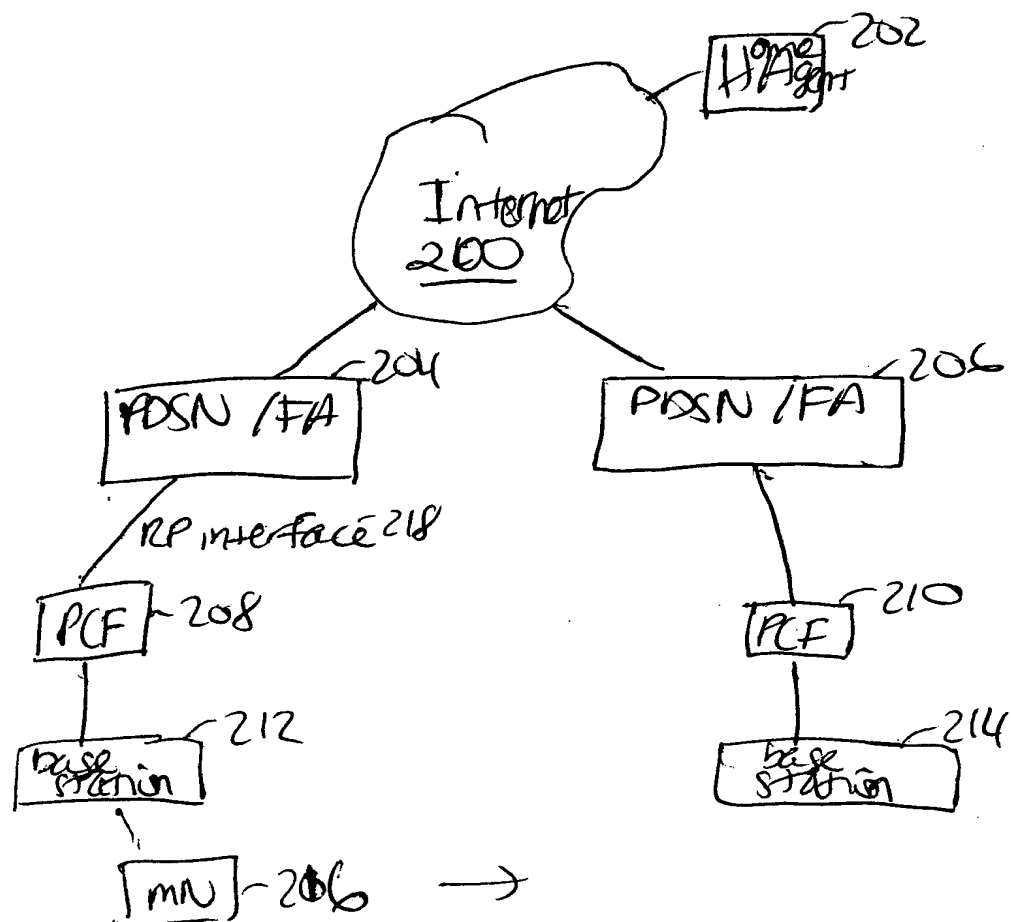


FIG. 2

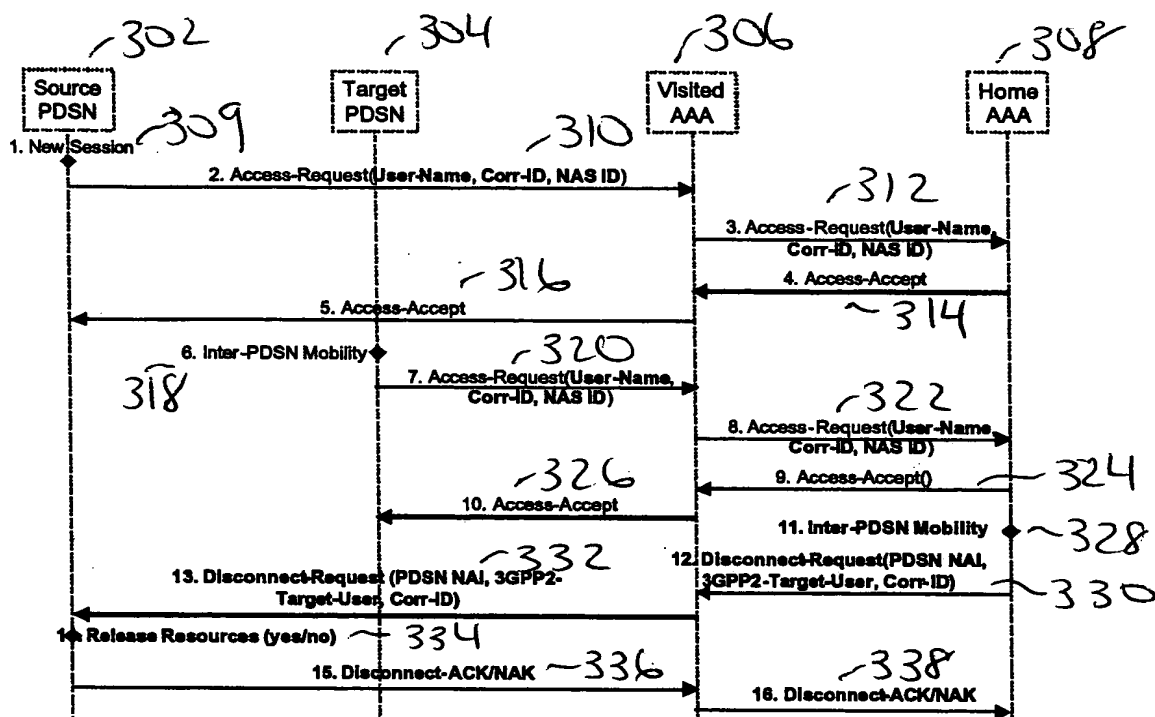


FIG. 3

Examples

Access-Request:

Username="gwz@cisco.com"
NAS ID="PDSN01.carrier.com"

Disconnect Request:

Username="PDSN01@carrier.com"
3GPP2-Target-User="gwz@cisco.com"

Disconnect ACK/NAK:

Username="gwz@cisco.com"
NAS-Identifier="PDSN01.carrier.com"

Tables (Bi-lateral agreement)

PDSN01.carrier.com

Realm	IP Addr of server	Secret
*	1.2.3.4	mysecret0

AAA.carrier.com (VAAA)

Realm	IP Addr of server	Secret

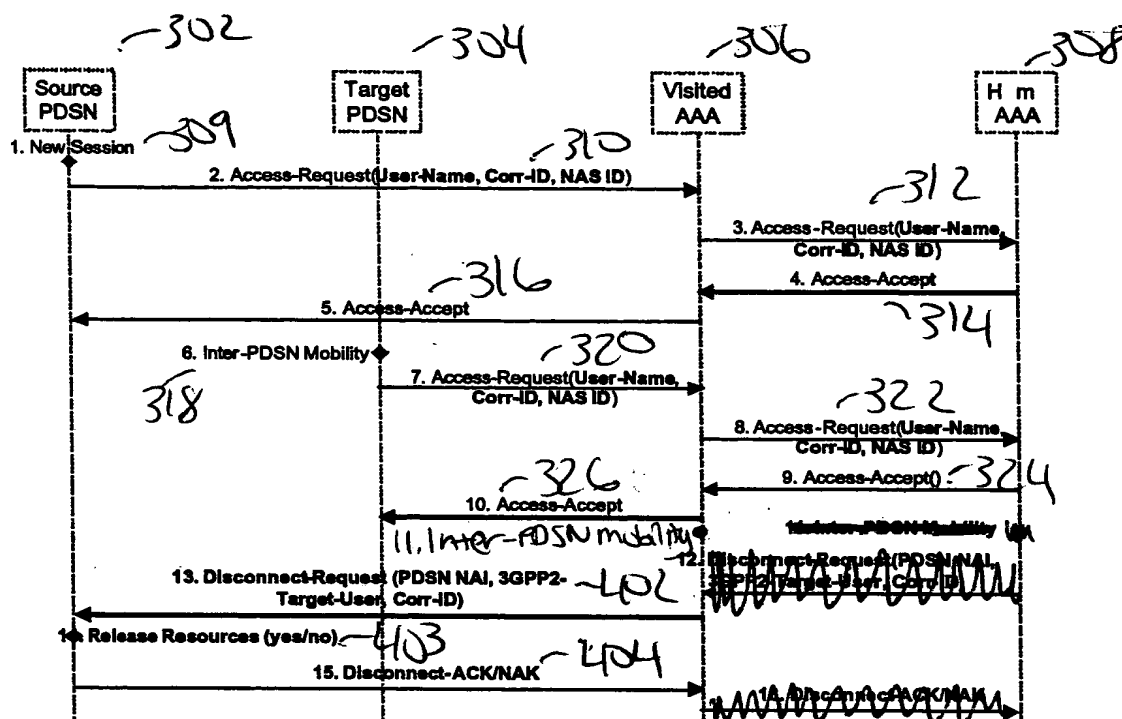


FIG. 4

Examples

Access-Request:

Username="gwz@cisco.com"
NAS ID="PDSN01.carrier.com"

Disconnect Request:

Username="PDSN01@carrier.com"
3GPP2-Target-User="gwz@cisco.com"

Disconnect ACK/NAK:

Username="gwz@cisco.com"
NAS-Identifier="PDSN01.carrier.com"

Tables (Bi-lateral agreement)

PDSN01.carrier.com

Realm	IP Addr of server	Secret
*	1.2.3.4	mysecret0

AAA.carrier.com (VAAA)

Realm	IP Addr of server	Secret

Disconnect request
message

PDSN identifier	Username identifier	Session identifier
-----------------	------------------------	--------------------

FIG. 5

Disconnect
acknowledgement

PDSN identifier	Username identifier	Session identifier
-----------------	------------------------	-----------------------

FIG. 6

Disconnect non-
acknowledgement

PDSN identifier	Username identifier	Failure cause	Session Identifier
-----------------	------------------------	------------------	-----------------------

FIG. 7

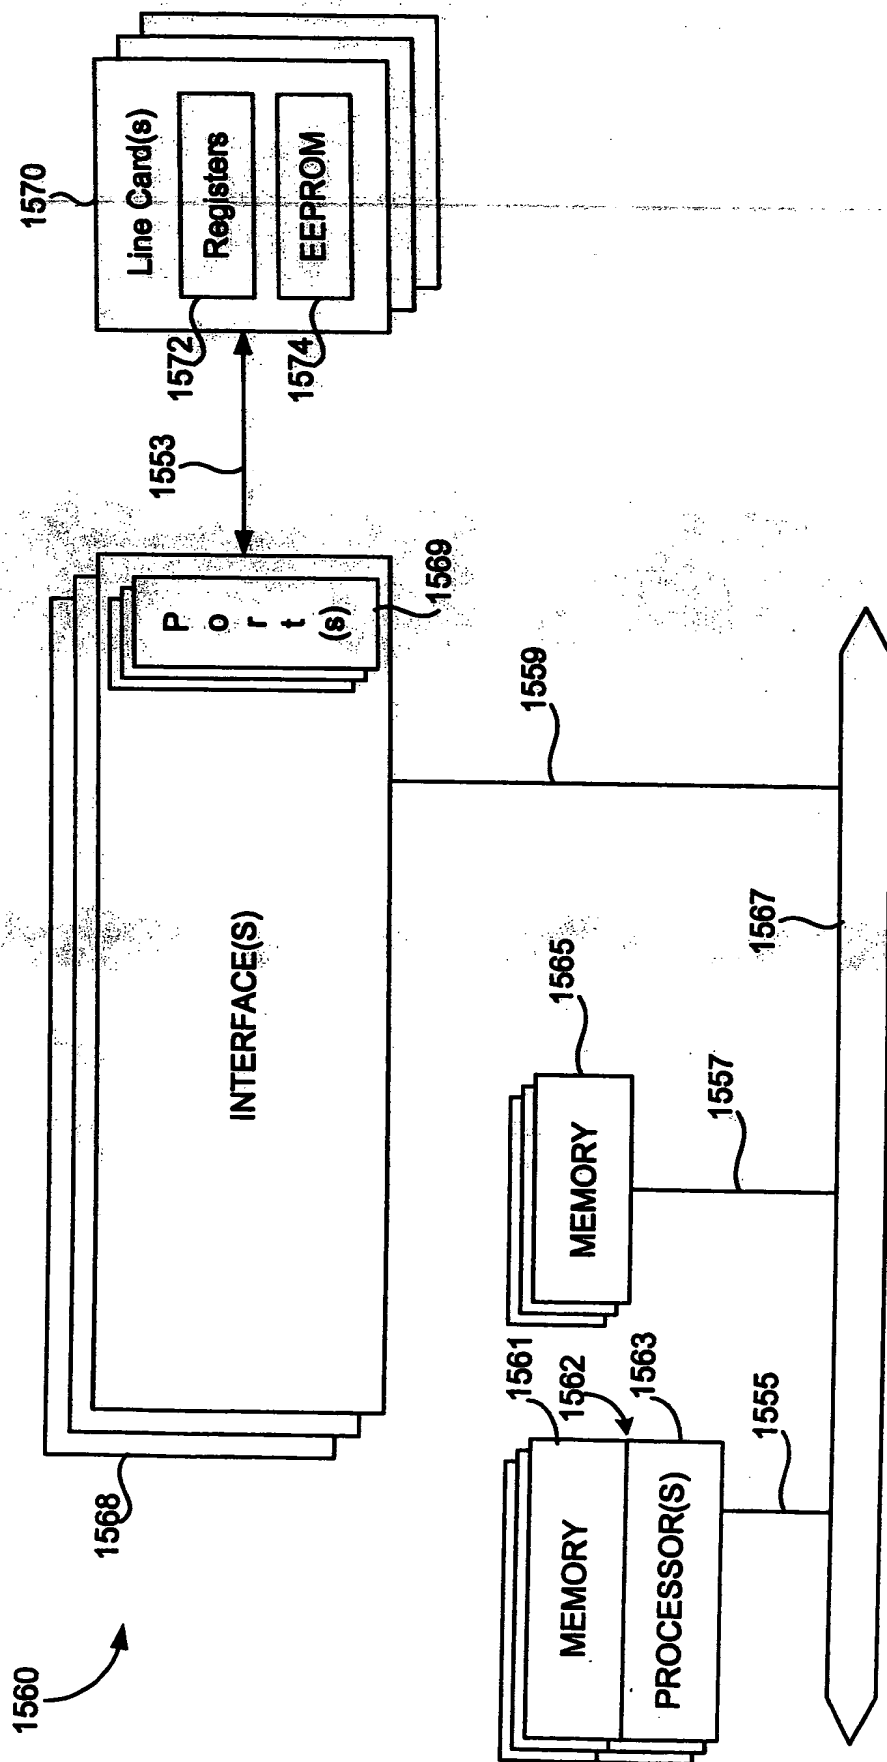


FIG. 15